



Model-V2945Z Cordless Shark Floor and Carpet Sweeper-Rotating Brush Replacement

An illustrated guide to fixing model V2945Z Shark-Floor & Carpet Vacuum. Guide details the step-by-step process for replacement of the rotating brush.

Written By: Robert Whelan



INTRODUCTION

This guide's intent is to provide instructions on how to fix this model of Shark Vacuum, by replacing a broken rotating brush. Its purpose is to educate viewers on how to do this simple repair. The detailed step-by-step instructions include hands-on illustrations throughout the process for this fix. The guide provides the quick, simple steps to locate and remove the brush for replacement. This guide saves viewers money from buying a new Shark Vacuum, by demonstrating how to fix their own.



TOOLS:

- [Flathead 3/32" or 2.5 mm Screwdriver](#) (1)
- [Scissors/Knife](#) (1)
- [1.5" Thin Putty Knife](#) (1)



PARTS:

- [V2945Z Shark Floor & Carpet Sweeper-Rotating Brush](#) (1)

Step 1 — Replacing a Rotating Brush



- ⚠ Turn vacuum off before starting the fix.
- Power-off vacuum by pressing the button on the left-rear side of vacuum until the red light is off.
- Lay vacuum down with handle lying flat on the floor.

Step 2




- ✦ Remove and empty dust tray; make sure to clean any debris built up.
- Lay vacuum up-side-down, locating the broken brush.

Step 3



- Turn the lock counter-clockwise to unlock access to the rotation brush; use a key or flathead screwdriver to fit the lock.
- Remove the square brush cover to access the rotation brush.
- ⓘ Once unlocked, the small square brush holder will detach.

Step 4

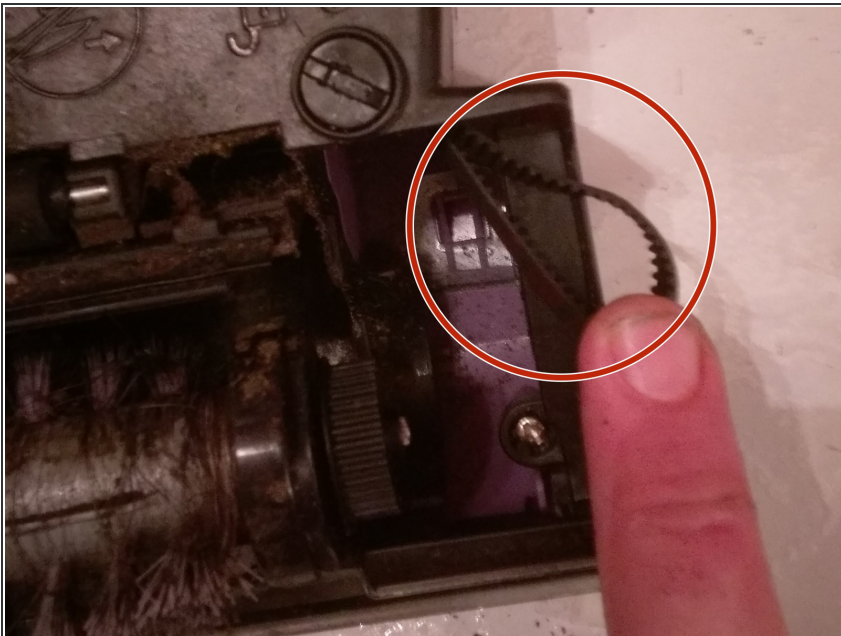

- Remove the large band from the rotation brush.
- Push the band to the side and lift up the right-side of the brush.



Step 5



- Detach left-side of the brush from the vacuum.

Step 6



-  Use scissors to cut away any debris entangled in the brush.
-  The brush is easily damaged by debris if not cleaned regularly; keeping the brush clean lengthens the life of the vacuum.
- Clean the area surrounding the brush by scraping with a putty knife before inserting the replacement brush.

To reassemble the device, follow these instructions in reverse order.

This document was last generated on 2017-08-05 08:06:14 PM.